

## E2DLS Series

LED LDisk Light  
CCT-Selectable • 6-in profile




\*Refer to the Stock Ordering Information Table below for qualified models


### KEY FEATURES

- Convenient can-less downlight solution mounts directly into ceiling surface
- EZCCT field-selectable CCT - 2700K, 3000K, 3500K, 4000K & 5000K @ >90 & >80 CRI options
- Energy efficient input power of 12W
- Easy two-piece installation while maintaining a slim unobtrusive outer profile
- Suitable for wet location installations
- Dimmable down to 10% with standard 120Vac triac dimmer switches

### Installation Overview

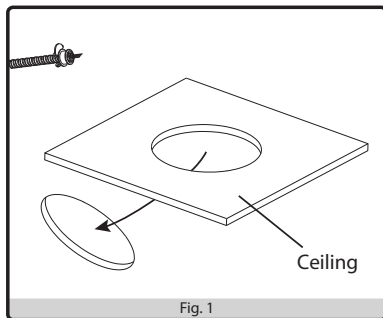

Installation can be made through cutting in a new ceiling or into an existing fixture with a through-hole (reflector needs to be removed first)

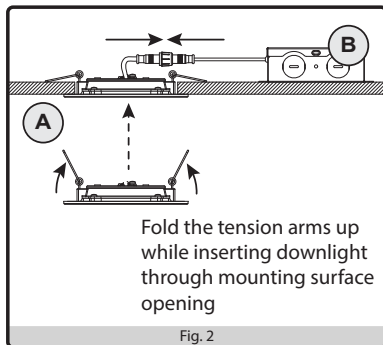


Mount the junction box (B) and make all electrical connections, pass the downlight (A) through ceiling surface and secure as shown.

### Load Information

Input Voltage	120Vac
Power Factor	0.9
Low Temp Start	-20°C (-4°F)
Max Temp	40°C (104°F)
Unit Weight	TBA lbs

### Dimensions

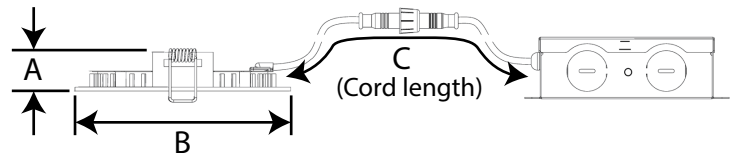

Description	Location	6 inch profile
Disk diameter	A	6.7"
Disk height	B	8.5"
Cord length	C	17.7"

### Stock Ordering Information and Specifications

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
E2DLS6-92750-L90	65163	900 lm	12 W	75	2700K, 3000K, 3500K, 4000K, 5000K selectable	90	120Vac	Triac	ETL	TBA
E2DLS6-850-L105	65161	1050 lm	12 W	85	2700K, 3000K, 3500K, 4000K, 5000K selectable	80	120Vac	Triac	ETL	TBA
E2DLS6-82765	75015	1050 lm	12 W	85	2700K, 3000K, 4000K, 5000K, 6500K selectable	80	120Vac	Triac	ETL	TBA