

FMS01R16E92750-TF-BN

14" Slim Flush Mount Fixture • 5 Year Limited Warranty





Overview

Energetic Lighting's FMS01R Flush Mount has 3 color temperatures ranging from 2700K to 5000K, including soft white/cool white/daylight. You could preset a color effect before mounting. Selectable colors meet multiple indoor applications.

This flush mount ceiling light compatible with triac dimmers (10% to 100%). It's convenient for you to create favorite brightness and control feeling of your space. High color rendition can restore the true colors of objects to the maximum, and get more vivid and accurate lighting effect.

It is suitable for hallway, kitchen, bedroom, living room, bathroom, basement, closet, stairwall, washroom and entry etc.

Features

- Ez-CCT field -selectable CCT -2700K(std), 4000K & 5000K @>90 CRI
- The thickness of the whole lamp is only 1.4in. It is simple, and neat.
- Metal lamp body with glass lens makes the flushmount modern and fashionable.
- Lifespan of this LED flush mount ceiling light is average 50,000 hrs.

Applications

- Residential and Multi-family
- Commercial and Retail
- Office and Hallway
- Healthcare and Hospitality
- General Indoor Area

Highlights





Load Information Input Voltage 120 V 24W Wattage **Power Factor** >0.9 Color 2700K/4000K/5000K/-3CCT Luminous 1560 LM CRI 90 Triac 10%-100% Dimmability Installation Type Flush Mount THD <20% Shape Round Glass, Metal Material 14"L x 14"W x 1.4"H Dimensions

Shipping Information

ltem	Weight	Box Qty.		
14"	27.5 lbs	6 per case		

Lumen Maintenance

Housing Type	Ambient	TM-21 Lumen Maintenance	Theoretical L70		
	Temperature	(50,000 hours)	(hours)		
14" profile	25°C	>85.51%	50,000		

Dimensions


14" Profile





FMSO1R 14" Slim Flush Mount Fixture CCT-select 50,000 System Lifetime • 5 Year Limited Warranty

Model Ordering Number

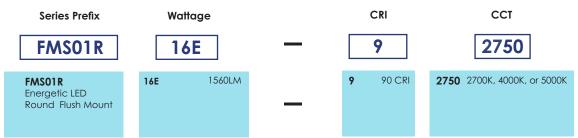

STOCK ORDER INFORMATION

14" Profile

CCT Selectable 14" Profile 120V

5	Model Number	Order #	Lumens	Wattage	LPW	Color Temp	CRI	Voltage	Dimming	DLC	Pallet Qty
: :	FMS01R16E92750-TF-BN	40080	1560 LM	24W	65	2700k,4000k, &5000k CCT	90	120V	Triac	ETL,ES	TBA