



**ENERGETIC**  
LIGHTING

Project:		Catalog #:		Type:	
----------	--	------------	--	-------	--

Prepared by:		Notes:		Date:	
--------------	--	--------	--	-------	--

## VTA

LED Vapor Tight Fixture  
Selectable CCT and Wattage  
2-ft, 4-ft, & 8-ft options •5-yr Warranty




## KEY FEATURES

- 2', 4', & 8' configurations available for design flexibility
- ezCCT selectable between 3500K and 5000K, and ezWATT selectable wattage
- All configurations are DLC 5.0 Standard listed
- 130+ LPW provides 40-60% in energy savings vs. fluorescent
- Polymer diffusing lens creates an extremely uniform visual aesthetic and provides targeted uniform illumination
- UL Listed wet location + IP66 rating
- Easy and tamper resistant installation
- Liquid-tight connector included / optional flexible metal conduit adapter available
- 120-277V drivers with 0-10v dimming standard
- NSF listed for ANSI 2 - Food Equipment use



## Highlights

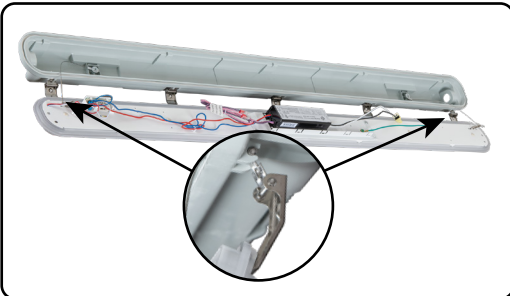

Convenient support latches will keep the top half suspended during installation, to free up hands during mounting and wiring



Surface-mounting clips



Liquid-tight cord bushing



Suspension V-hook brackets (two provided)



CCT & Wattage selectable (3500K or 5000K)

## Load Information


<b>Power Factor</b>	0.9
<b>THD</b>	10%
<b>Low Temp Start</b>	-40°C (-40°F)
<b>Max Temp</b>	45°C (113°F)
<b>Unit Weight</b>	TBA

## Shipping Information


Item	Weight	Box Qty.
2-ft length	TBA	TBA
4-ft length	TBA	TBA
8-ft length	TBA	TBA

## Dimensions


**2-ft models:**  
VTA2N32SE83550



**4-ft models:**  
VTA4N44SE83550  
VTA4N58SE83550



**8-ft models:**  
VTA8N117SE83550

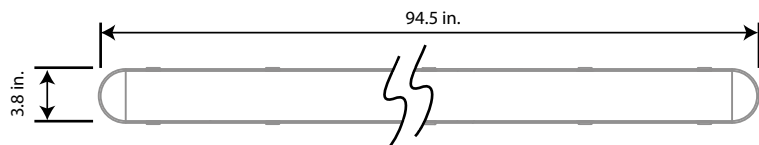

**STOCK ORDERING INFORMATION**

2-FT Housing Length

**2-FT Housing Length**

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA2N32SE83550	90038	3250, 2600, 1950 LM Select	25, 20, 15 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA

4-FT Housing Length

**4-FT Housing Length**

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA4N44SE83550	90039	4420, 3900, 3250 LM Select	34, 30, 25 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA
VTA4N58SE83550	90040	5850, 4940, 4420 LM Select	45, 38, 34 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA

8-FT Housing Length

**8-FT Housing Length**

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA8N117SE83550	90041	11700, 9750, 8450 LM Select	95, 75, 65 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA

**Optional Accessories**



**ENERGETIC**  
L I G H T I N G

**VTA**

CCT&W-Select LED Vapor Tight Fixture  
2-ft, 4-ft, & 8-ft options • 5-yr Warranty

**NOTES:**

Empty rectangular box for notes.